


推荐丝杠轴端加工尺寸

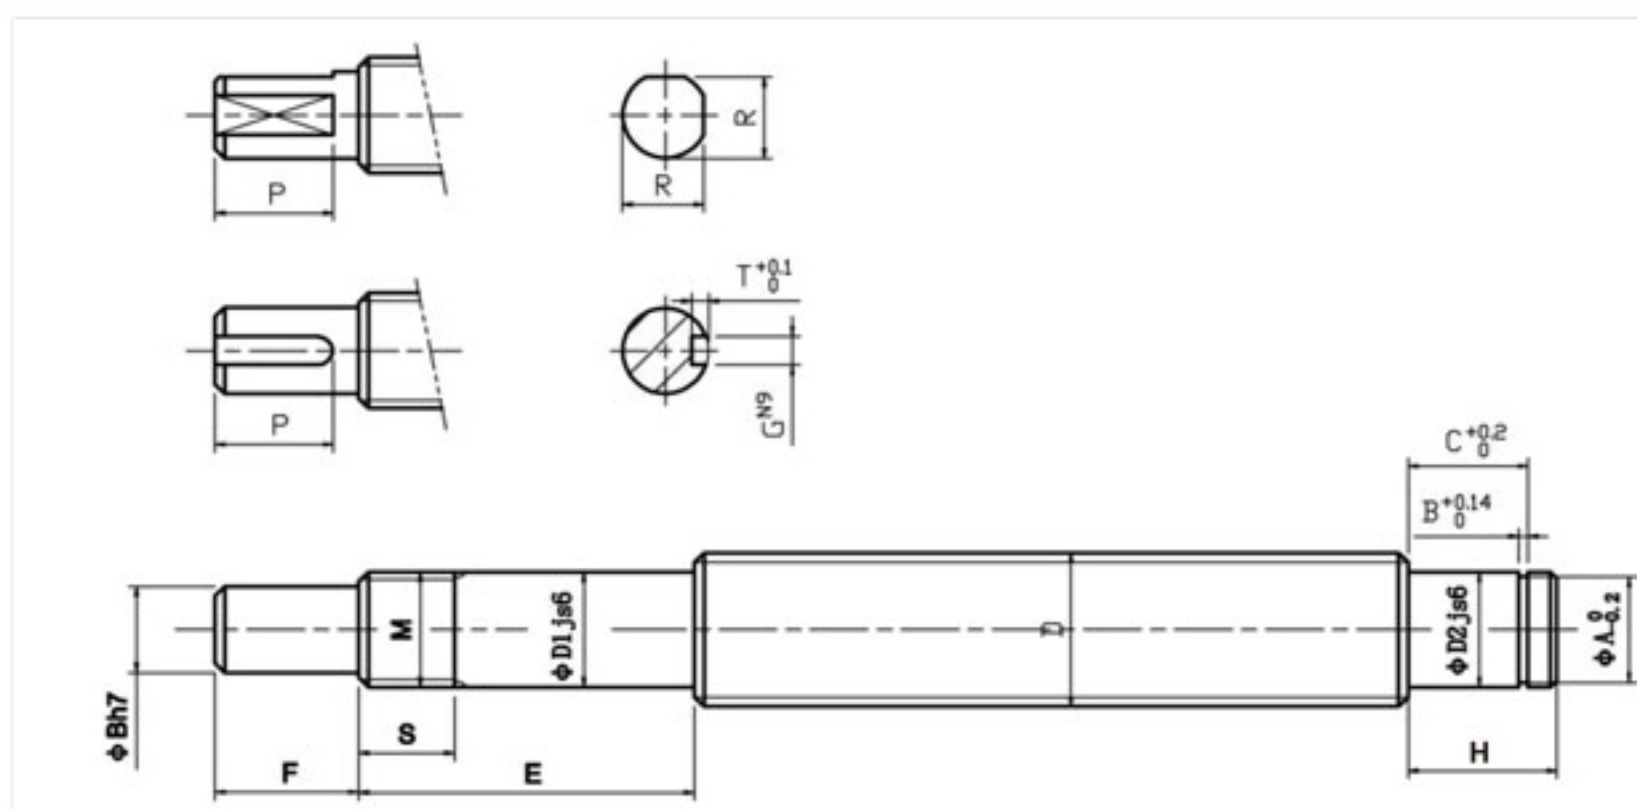

固定端 支撑单元BK型、EK型、FK型

支撑单元公称型号		滚珠丝杠外径 D	D1	E	B	F	M	S	J 2 型 键 槽		J3 型二平面	
									GxT	P	R	P
FK4	EK4	6	4	23	3	5	M4x0.5	7	—	—	2.7	4
FK5	EK5	8	5	25	4	6	M5x0.5	7	—	—	3.7	5
FK6	EK6	8	6	30	4	8	M6x0.75	8	—	—	3.7	6
FK8	EK8	12	8	35	6	9	M8x1	10	—	—	5.6	7
FK10	EK10	14/16	10	36	8	15	M10x1	11	2x1.2	11	7.5	11
FK12	EK12	16	12	36	10	15	M12x1	11	3x1.8	12	9.5	12
FK15	EK15	20	15	49	12	20	M15x1	13	4x2.5	16	11.3	16
FK20	EK20	32	20	64	17	25	M20x1	17	5x3	21	16	21
FK25	-	32	25	76	20	30	M25x1.5	20	6x3.5	25	19	25
FK30	-	40	30	72	25	38	M30x1.5	25	8x4	32	23.5	32
Bk10		14/16	10	36	8	15	M10x1	16	2x1.2	11	7.5	11
BK12		16	12	36	10	15	M12x1	14	3x1.8	12	9.5	12
BK15		20	15	40	12	20	M15x1	12	4x2.5	16	11.3	16
BK17		25	17	53	15	23	M17x1	17	5x3	21	14.3	21
BK20		32	20	53	17	25	M20x1	15	5x3	21	16	21
BK25		32	25	65	20	30	M25x1.5	18	6x3.5	25	19	25
BK30		40	30	72	25	38	M30x1.5	25	8x4	32	23.5	32
BK35		45	35	83	30	45	M35x1.5	28	8x4	40	28.5	40
Bk40		50	40	98	35	50	M40x1.5	35	10x5	45	33	45

支撑端 支撑单元BK型、EK型、FK型

支撑单元公称型号			滚珠丝杠外径	D2	H	C	B	A
BF型	EF型	FF型	D					
BF10	EF10	FF10	12/14	8	10	7.9	0.9	7.6
BF12	EF12	FF12	16	10	11	9.15	1.15	9.6
BF15	EF15	FF15	20	15	13	10.15	1.15	14.3
BF17	—	—	25	17	16	13.15	1.15	16.2
BF20	EF20	FF20	32	20	★(16)19	(13.35) 15.35	1.35	19
BF25	—	FF25	32	25	20	16.35	1.35	23.9
BF30	—	FF30	40	30	21	17.75	1.75	28.6
BF35	—	—	45	35	22	18.75	1.75	33
BF40	—	—	50	40	23	19.95	1.95	38

注：★处()内的尺寸表示BF20的尺寸，它与FF20、EF20的尺寸不同。